


MB 20+4 PIN 主板接口 (20+4 PIN)

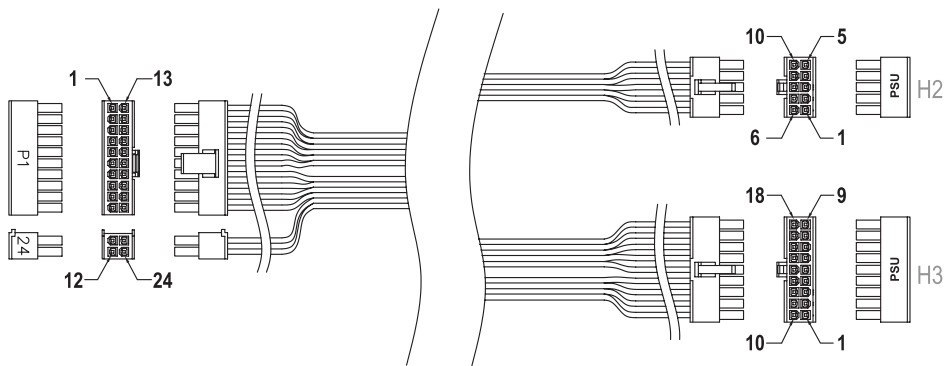

H1

PIN	Rating	PIN	Rating	PIN	Rating
1	+3.3V	8	PW_OK	16	PS_ON
2	+3.3Vs	9	+5Vsb	17	COM
3	+3.3V	10	+12Vs	18	COM
4	+5V	11	+12V	19	COM
5	COM	12	+3.3V	20	NC
6	+5V	13	+3.3V	21	+5V
7	COM	14	-12V	22	+5V
		15	COM	23	+5V
				24	COM


H2

PIN	Rating
1	+3.3V
2	+3.3V
3	+5Vs
4	+3.3V
5	COM
6	+3.3V
7	+12V
8	+12V
9	-12V
10	COM

H3

PIN	Rating	PIN	Rating
1	PS_ON	10	PW_OK
2	+3.3Vs	11	+5Vsb
3	+5Vs	12	COM
4	+12Vs	13	
5	+5Vs	14	+5V
6	+5V	15	+5V
7	+5V	16	COM
8	COM	17	COM
9	COM	18	COM

CPU 4+4 PIN CPU接口 (4+4 PIN)

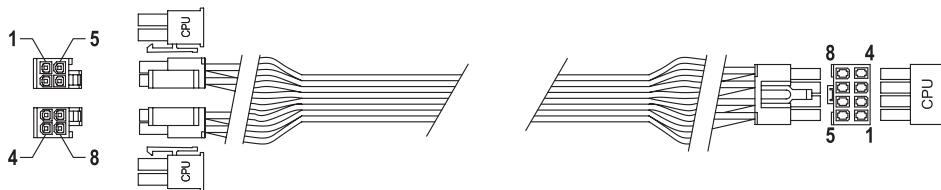


H1

PIN	Rating	PIN	Rating
1	COM	5	+12V
2	COM	6	+12V
3	COM	7	+12V
4	COM	8	+12V

H2

PIN	Rating	PIN	Rating
1	COM	5	+12V
2	COM	6	+12V
3	COM	7	+12V
4	COM	8	+12V

PCI-e 6+2 PIN 显卡接口 (6+2 PIN)

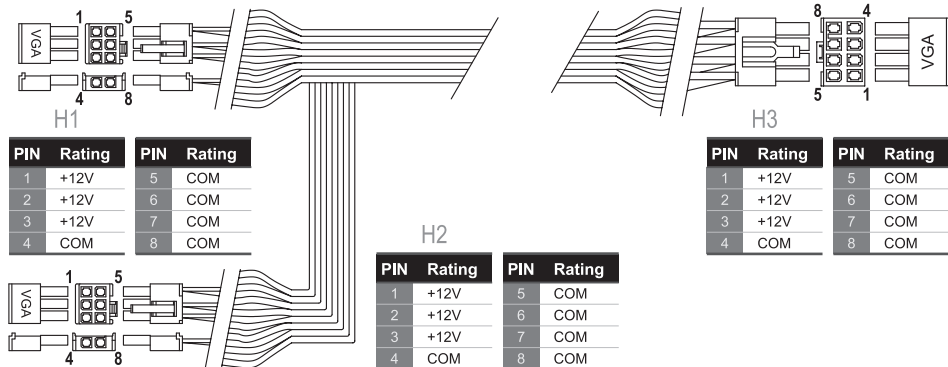

Peripheral SATA / PATA接口

